
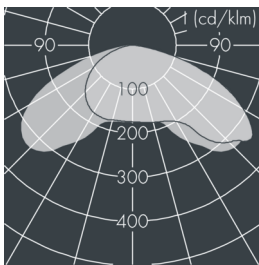


Superlight LED 3

8 887 265 199

55 W, 4175 lm, 4000 K neutral white, DALI, Comfort Optic 16°

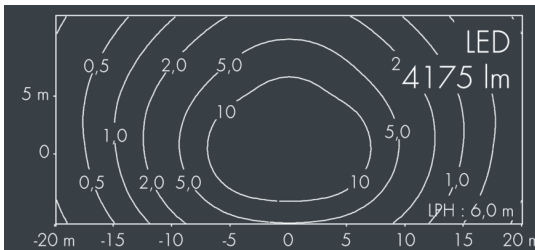

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing made of die-cast aluminum ALSi12, polyester powder coated by high-quality and UV-stabilized coating process, Colour: white RAL 9002, all exterior parts are stainless steel, tempered safety glass, anti-reflective coating from 1 side, dark screenprint, silicon gasket, closure with 4 stainless steel screws, for installation on poles \varnothing 60-100mm, adjustable aluminum mounting base, powder coated: 2 drilled holes \varnothing 9mm, spacing 75mm, 1 centre hole \varnothing 17mm, tilt range: 205°, cable gland: M20, connecting terminal: 5 pole, micro-prism optic directs light under defined angles and achieves, together with shielded LEDs, perfect glare control, integral programmable and DALI dimmable driver, max 3 SDCM, service life L80/B20 > 50.000 h, Beam angle (FWHM): 16°, luminous flux: 4175 lm, wattage: 55 W, delivered lumens 76 lm/W, protection type IP67, protection class I, impact resistance IK08, windage area 0,08 m², dimensions (L×H×W): 280 × 74 × 280 mm, weight 6.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE and ENEC marks.



Specification

Wattage	55 W	Beam angle (FWHM)	16°
Delivered lumens	76 lm/W	Housing colour	white RAL 9002
Light source	LED 4000 K	Power supply cable	\varnothing 6 – 13 mm
Colour tolerance	max 3 SDCM	Protection type	IP67
Lifetime to 25° C	L80/B20 > 50.000 h	Protection class	I
Control gear	DALI	Impact resistance	IK08
		Windage area	0,08m ²
		Dimensions	280 × 74 × 280 mm
		Weight	6,60 kg
		Max. ambient temperature ta	40°