
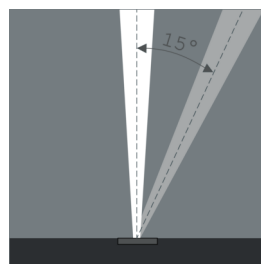
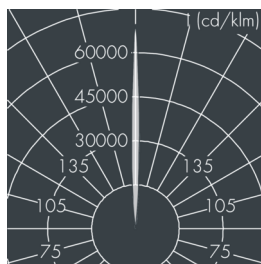


Uplight 135

8 658 015 019

3 W, 142 lm, 4000 K neutral white,
narrow beam, adjustable 4°

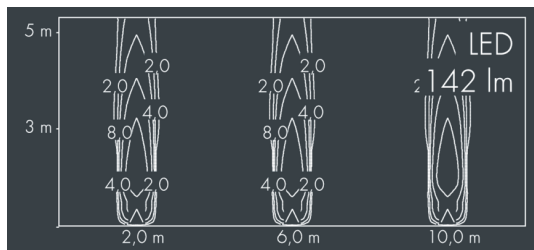

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

Specification text

housing of corrosion-resistant die-cast aluminum $AlSi12$, double polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass flush with frame, anti-reflective coating from 1 side, dark screenprint, for loads up to max. 5000 kg (according to IEC / EN 60598-2-13), silicon gasket, cover frame and closure with 3 stainless steel screws, cable gland: M20, connecting terminal: 3 pole, highly efficient anodized rotationally symmetrical reflector, lockable, tilt range: 0-15°, 0,8 m cable Ho5RN-F3G1, integral driver (AC/DC), max 2 SCDM, service life $L_{90}/B_{10} > 50.000$ h, Beam angle (FWHM): 4°, luminous flux: 142 lm, wattage: 3 W, delivered lumens 47 lm/W, protection type IP67, protection class I, impact resistance IK10, dimensions: Ø 135 mm, width 131 mm, weight 1.6 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP67 IK10

Specification

Wattage	3 W	Beam angle (FWHM)	4°
Delivered lumens	47 lm/W	Housing colour	black RAL 7021
Light source	LED 4000 K	Power supply cable	Ø 6 – 13 mm
Colour tolerance	max 2 SCDM	Protection type	IP67
Lifetime ta 25° C	$L_{90}/B_{10} > 50.000$ h	Protection class	I
Control gear	on / off	Impact resistance	IK10
Input voltage AC	90 – 295 V	Dimensions	Ø 135 mm, width 131 mm
Input voltage DC	120 – 415 V	Weight	1,60 kg
		Max. ambient temperature ta	41°