
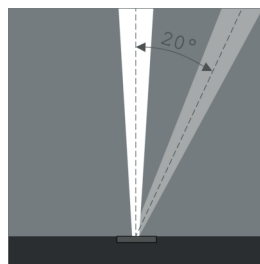



## Uplight 250

8 668 016 019

18 W, 1841 lm, 3000 K warm white,  
narrow beam, adjustable 9°

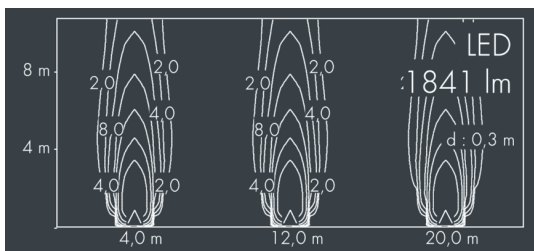

Customized solutions and modifications are possible: Special RAL, DB or NCS colours as polyester powder coat, luminaires in 2700 K and other colour temperatures and versions for high ambient temperature.

## Specification text

housing of corrosion-resistant die-cast aluminum AlSi12, double polyester powder coated by high-quality and UV-stabilized coating process, Colour: black RAL 7021, all exterior parts are stainless steel, tempered safety glass flush with frame, anti-reflective coating from 1 side, dark screenprint, for loads up to max. 4500 kg (according to IEC / EN 60598-2-13), silicon gasket, cover frame and closure with 6 stainless steel screws, cable gland: M20, connecting terminal: 3 pole, highly efficient anodized rotationally symmetrical reflector, lockable, tilt range: 0-20°, lockable, with tight lock mechanism for pivoting on the container of the light housing, with heatslide mechanism for optimal heat dissipation, 0,8 m cable Ho7RN-F3G1, integral driver (AC), CRI > 80, max 3 SDCM, service life L80/B20 > 50.000 h, Beam angle (FWHM): 9°, luminous flux: 1841 lm, wattage: 18 W, delivered lumens 101 lm/W, protection type IP67, protection class I, impact resistance IK10, dimensions: Ø 250 mm, width 216 mm, weight 5,7 kg

The modular luminaire design makes the replacement of components possible. The product meets the demands of the applicable EU guidelines and product safety regulations and bears the CE mark.



IP67 IK10

## Specification

|                            |                      |                             |                        |
|----------------------------|----------------------|-----------------------------|------------------------|
| Wattage                    | 18 W                 | Beam angle (FWHM)           | 9°                     |
| Delivered lumens           | 101 lm/W             | Housing colour              | black RAL 7021         |
| Light source               | LED 3000 K           | Protection type             | IP67                   |
| Color Rendering Index      | CRI > 80             | Protection class            | I                      |
| Colour tolerance           | max 3 SDCM           | Impact resistance           | IK10                   |
| Lifetime ta 25° C          | L80/B20 > 50.000 h   | Dimensions                  | Ø 250 mm, width 216 mm |
| Control gear               | on / off             | Weight                      | 5,70 kg                |
| Input voltage AC           | 220 – 250 V          | Max. ambient temperature ta | 40°                    |
| Voltage protection         | 2 kV L/N   4 kV L/PE |                             |                        |
| Luminaires per B16A / C16A | 69 / 81              |                             |                        |